# MODULA DUO

Individual positioningFunctionalityVariety








# Perfection is attained, not when no more can be added, but when no more can be removed.


0

0

(Antoine de Saint-Exupéry, Terre des Hommes)

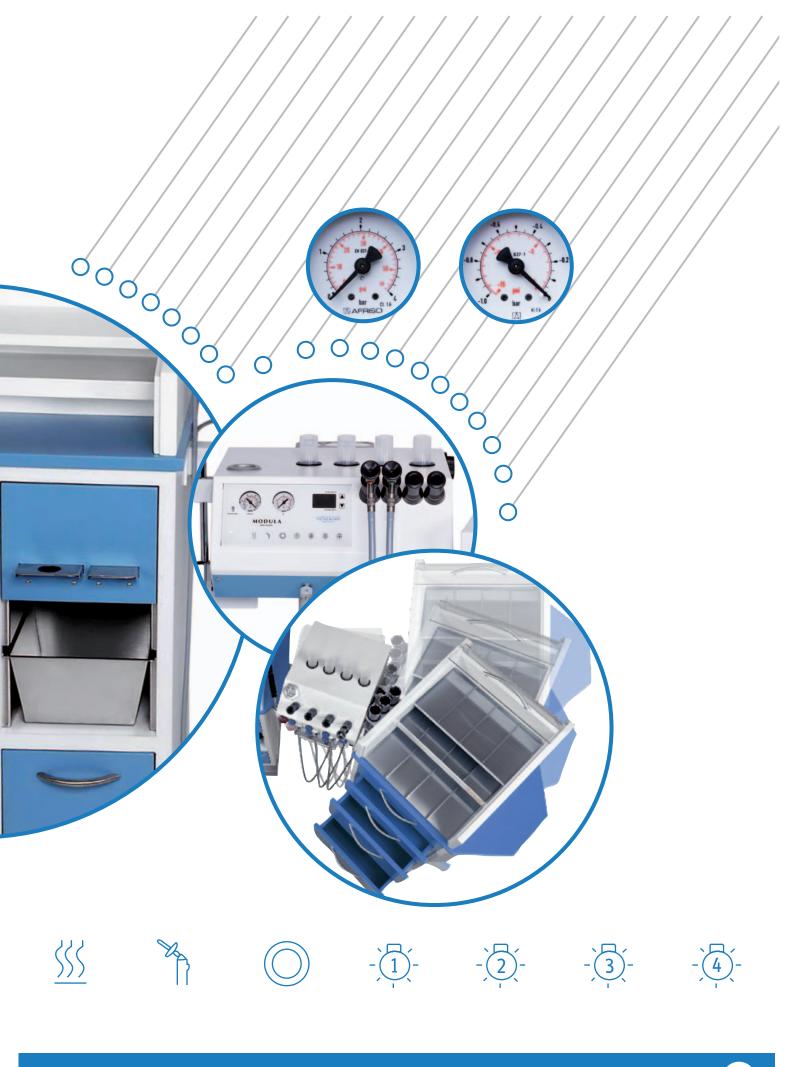

### Innovation & Flexibility

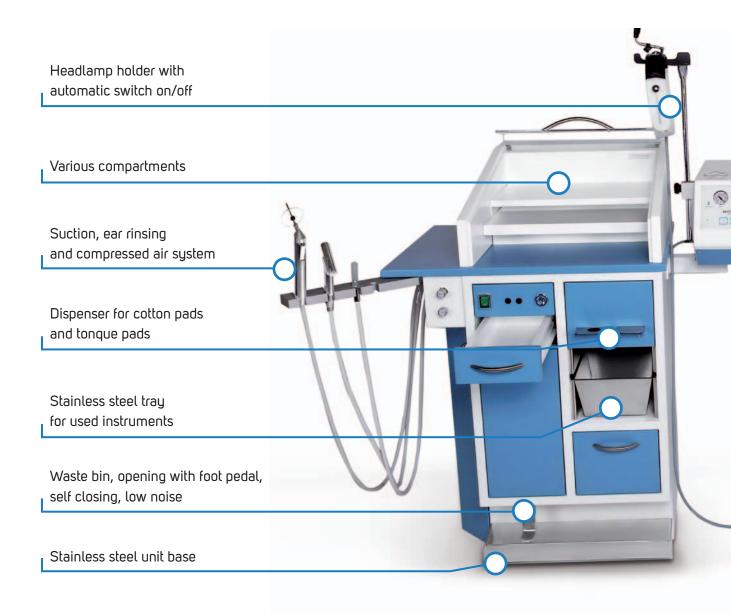

#### MODULA Duo – advantages through flexibility and individual design

MODULA Duo – our "state-of-the-art" ENT treatment unit built with the highest standard also includes the latest technology. The convincing technology, the ergonomic design as well as an optimum of functional components are the main characteristic of this treatment unit. The technical part and the instrument cabinet are connected with a cold light module. The cold light module includes LED lights (up to 4 light sources) preheated endoscope quivers, disinfection quivers and mirror heater. Diagnostic microscope,



Glass display with touch keys for electronic

swivel arm, TFT monitor or upper shelf are also available and can be attached to the unit, if requested.

Free choice of the instrument cabinets configuration, as of writing desk, drawers with silent system and open compartments. The mobile MODULA DUO meets even the highest demands and assures an optimum of comfort during the treatment for the doctor and for the patient as well.

## Equipment & Colors

#### Standard equipment

- High quality electrolytic zincplated steel cabinet with soundproofing
- Extremely hard wearing with enamel finish with corrosion-resistant pretreatment
- Mobile on antistatic heavy duty castors
- Electronic control and indication panel: glass display with 7 different function keys, 2 manometers (compressed air and vacuum)
- Swiveling holder for water handpiece, suction hose, compressed air handpiece
- Holder for headlamp (not switchable)
- Integrated mirror heater


- 6 fully extendable, self-closing drawers
- Writing leaf
- 4 removable disinfection quivers for rigid endoscopes, autoclavable
- Instruments on 2 levels with stainless steel trays
- Built-in illumination for instrument levels
- Stainless steel tray for used instruments
- Waste bin, opening with foot pedal, self closing, low noise
- Transparent acrylic top cover, storable behind the unit

#### Standard colors (antimicrobial coating with fine structure)



MODULA DUO

## Technical details\*

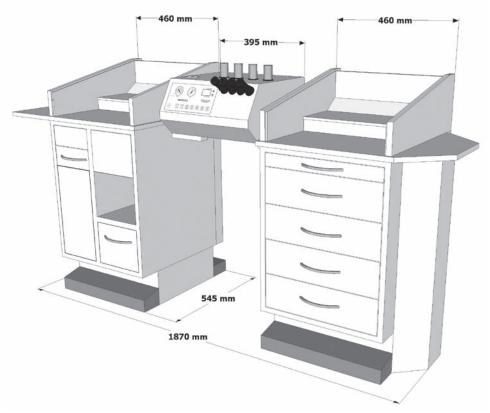

\*(subject to modifications)

Power supply:	230 V (+/- 10%)
Frequency:	50/ 60 Hz
Current consumption:	max. 10 A
Power consumption:	max. 2,3 kVA
Classification:	lla
CE-Sign:	MEDCERT 0482
Protection class:	I
Degree of protection:	В
Compressed air (option):	12 L/min at 2700 RPM and 138 VA, 0,2 to 4,0 bar adjustable
Powered suction (option):	Oil-free vacuum pump (150 VA): suction performance 40 l/min, 0 to -0,85 bar, sensor
	switch for suction hose, electronic and mechanical safety overflow system with antibacterial filter
Ear rinsing system (option):	
Ear rinsing system (option): Autonomous ear rinsing system (option):	safety overflow system with antibacterial filter 37°C +/- 1°C, 500 ml/min, max. 1500 VA
	safety overflow system with antibacterial filter 37°C +/- 1°C, 500 ml/min, max. 1500 VA (long-term usage) 37°C +/- 1°C, 500 ml/min, max. 550 VA
Autonomous ear rinsing system (option):	safety overflow system with antibacterial filter 37°C +/- 1°C, 500 ml/min, max. 1500 VA (long-term usage) 37°C +/- 1°C, 500 ml/min, max. 550 VA (long-term usage)
Autonomous ear rinsing system (option): Watertank (option):	safety overflow system with antibacterial filter 37°C +/- 1°C, 500 ml/min, max. 1500 VA (long-term usage) 37°C +/- 1°C, 500 ml/min, max. 550 VA (long-term usage) 5 liter

## Contact

G. Heinemann Medizintechnik GmbH Gruetzmuehlenweg 44 22339 Hamburg Germany Phone.: +49 (0)40 - 538 904 0 Fax: +49 (0)40 - 538 62 55 Email: info@heinemann-ent.de Web: www.heinemann-ent.de

