MODULA EUROPA



Easy handling

• A good placement











Perfection is attained, not when no more can be added,


but when no more can be removed.

(Antoine de Saint-Exupéry, Terre des Hommes)






Ergonomic Design & Reliability

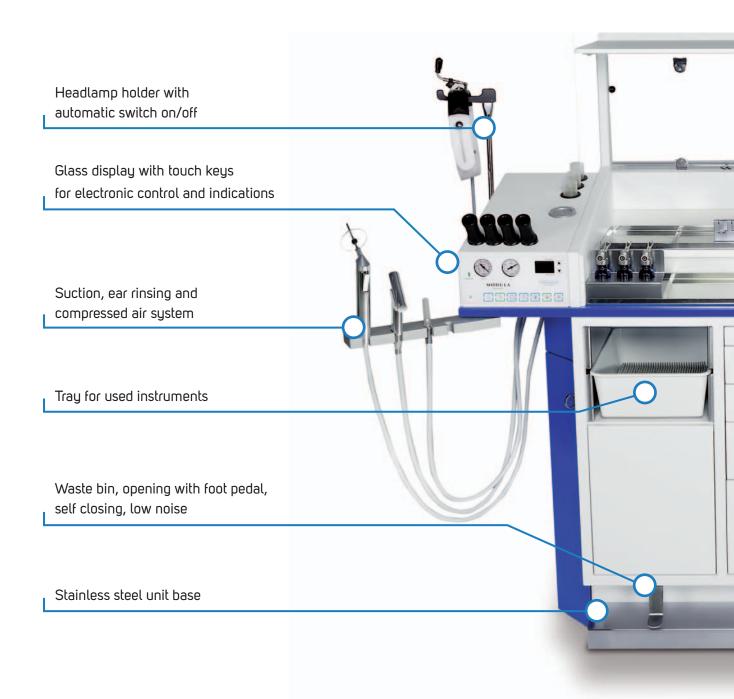

MODULA Europa — easy maintenance, high quality, functionality

MODULA Europa – our "best seller"designed for hospitals and clinics for many patients. The design of the unit reflects the optimal solution of ergonomic and practice oriented aspects, with the result of a tidy workplace. An extension up to 4 LED cold light sources, additional accessories as of automatic secretion system, hose cleaning devices etc., will meet any individual demand. The treatment unit MODULA Europe offers the optimal size for placing additional devices and spaces enough for

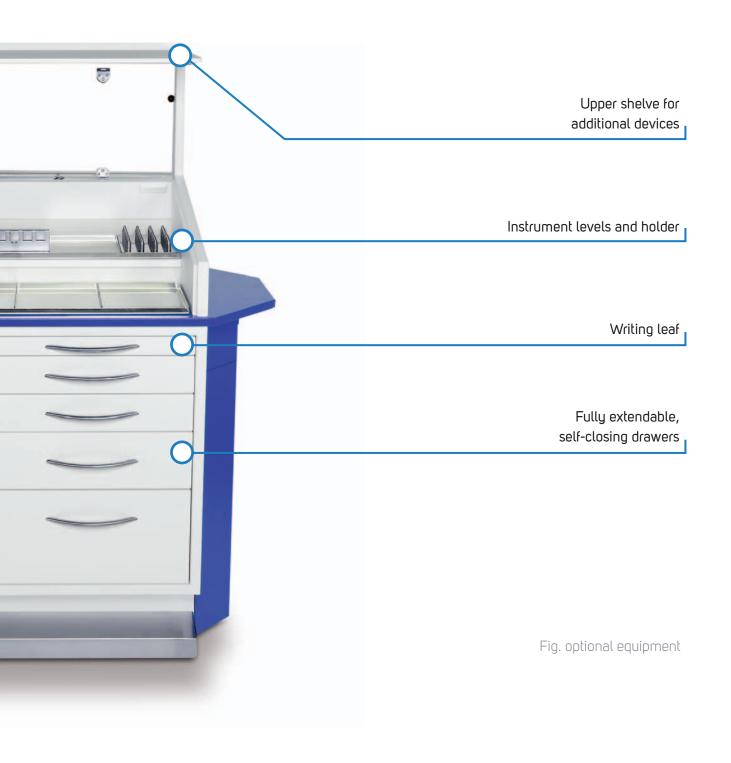

a number of sterile instruments. All drawers are equipped with with a self-closing mechanism, instruments can be stored up to three levels. Diagnostic microscope, swivel arm or TFT monitor can be also attached to the treatment unit. An upper

shelf is also available, if required. Mobile instrument cabinets are also available, in different sizes but in the same design.

Equipment & Colors

Standard equipment

- High quality electrolytic zincplated steel cabinet with soundproofing
- Extremely hard wearing with enamel finish with corrosion-resistant pretreatment
- Mobile on antistatic heavy duty castors
- Electronic control and indication panel: glass display with 7 different function keys, 2 manometers (compressed air and vacuum)
- Swiveling holder for water handpiece, suction hose, compressed air handpiece
- Holder for headlamp (not switchable)
- Integrated mirror heater

- 4 fully extendable, self-closing drawers
- · Writing leaf
- 3 removable disinfection quivers for rigid endoscopes, autoclavable
- Instruments on 2 levels with stainless steel traus
- Built-in illumination for instrument levels
- Melamin tray for used instruments
- Waste bin, opening with foot pedal, self closing, low noise
- Transparent acrylic top cover, storable behind the unit after opening

Standard colors (antimicrobial coating with fine structure)



9010

Pure white

9016

Traffic white


7045

Telegrey 1

7044

Silk grey

Technical details*

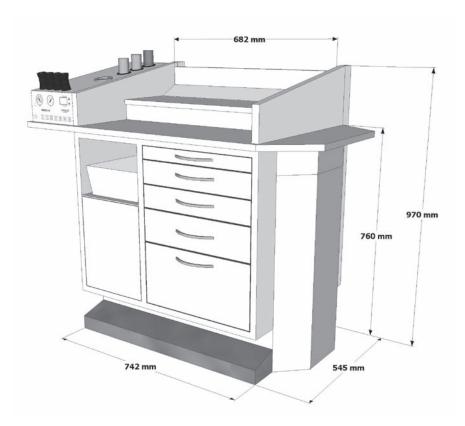

*(subject to modifications)

Power supply:	230 V (+/- 10%)
Frequency:	50/ 60 Hz
Current consumption:	max. 10 A
Power consumption:	max. 2,3 kVA
Classification:	lla
CE-Sign:	MEDCERT 0482
Protection class:	1
Degree of protection:	В
Compressed air (option):	12 L/min at 2700 RPM and 138 VA, 0,2 to 4,0 bar adjustable
Powered suction (option):	Oil-free vacuum pump (150 VA): suction performance 40 l/min, 0 to -0,85 bar, sensor switch for suction hose, electronic and mechanical safety overflow system with antibacterial filter
Ear rinsing system (option):	37°C +/- 1°C, 500 ml/min, max. 1500 VA (long-term usage)
Autonomous ear rinsing system (option):	37°C +/- 1°C, 500 ml/min, max. 550 VA (long-lerm usage)
Watertank (option):	5 liter
Weight:	approx. 160 kg
Ambient temperatures	Temp. +15°C to +35°C
Ambient temperature:	1611p. 110 C to 100 C

Contact

G. Heinemann Medizintechnik GmbH

Gruetzmuehlenweg 44

22339 Hamburg

Germany

Phone.: +49 (0)40 - 538 904 0

Fax: +49 (0)40 - 538 62 55

Email: info@heinemann-ent.de

Web: www.heinemann-ent.de

